



# INSTRUCTIONS

## DML / DCL Filter drier



023R9514

DCL: R 12, R 22, R 502 et al.  
DML: R 134a, R 404A, R 407 C, R 410 A, R 507 et al.

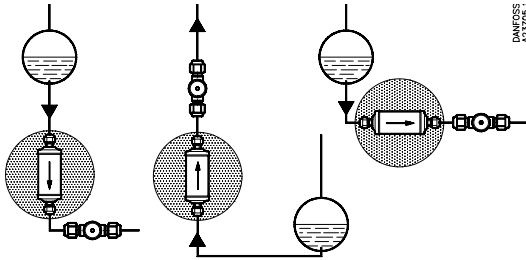
023R9514

**Solder versions**

Symbol	Connection	MWP
	1/4 in	610 psig/ 42 bar
	5/16 in	
	3/8 in	
	1/2 in	
	5/8 in	500 psig/ 35 bar
	3/4 in	
	7/8 in	
	1 1/8 in	

**Flare / Face Seal versions (ORS)**

Symbol	Connection	MWP
	All sizes	610 psig/ 42 bar

**Note!**

Max. working pressure (PB/MWP) shall not be less than the pressure outlined in sect. 8.2 of ANSI / ASHRAE 15 for the refrigerant used in the system.

After charging, the system shall be marked with the refrigerant and the oil used.

